Spartan S330/2

- **Introductory Machine**
- **Utility vs. Production**
- **Competes well with;**
  - **Hyd-Mech S20**
  - **HEM Twister**
  - **DoAll 916**

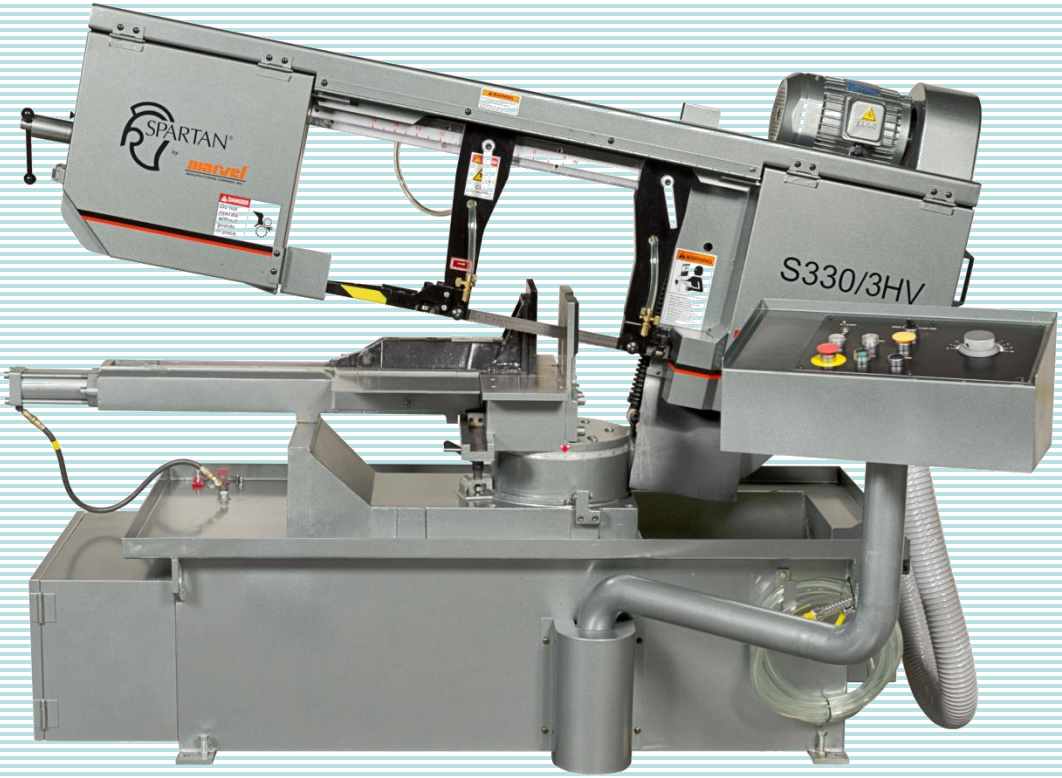

Spartan S330/2

Hercules		S330/2
Capacity	90°	● 13" (330 mm)
	90°	■ 12" x 18" (300 x 460 mm)
	45°	● 13" (330 mm)
	45°	■ 11" x 12" (280 x 300 mm)
	60°	● 9.5" (240 mm)
	60°	■ 11" x 8" (280 x 203 mm)
Blade Speed		0 to 330 FPM Inverter Drive
Blade Size		13’ 6” L x 1” W x .035” T (4115 x 27 x 0.9 mm)
Machine Vise		Manual Quick Position with Cam Lock
Motors	Blade Drive	3 HP (1.5kW)
	Hyd. Pump	1/2 HP (0.375 kW)
	Coolant Pump	1/8 HP (0.09 kW)
Table Height		30.5" (775 mm)
Machine Weight		1800 lbs. (820 kg)
Dimensions		

Spartan S330/2

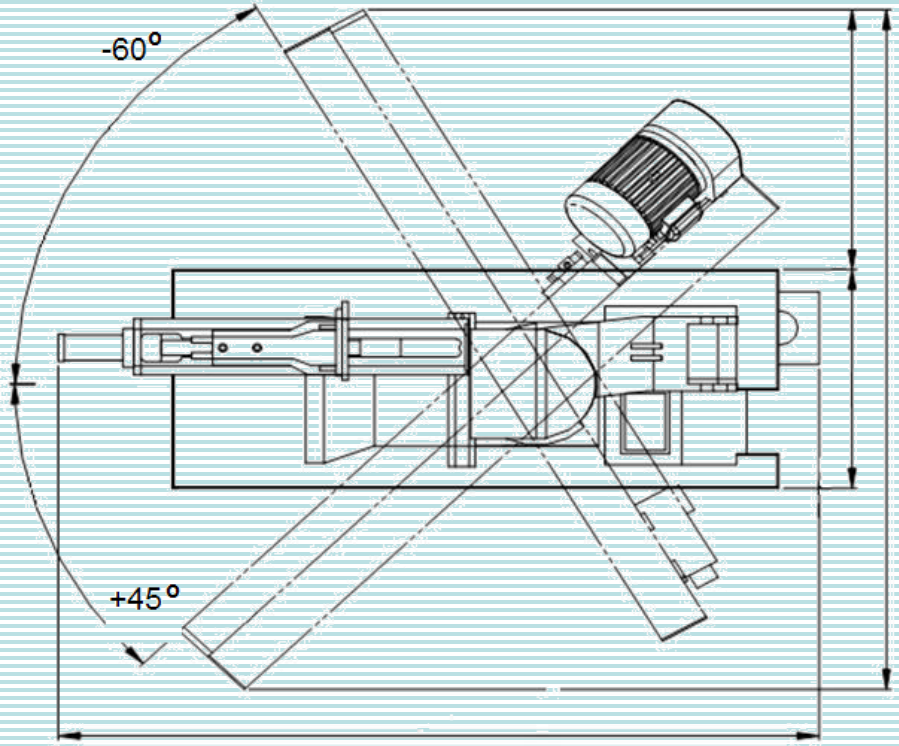

Swivel head miter cutting 45° rear, 30° front
Capacities;
@ 90°: 12” H x 18” W Rectangle, 13” Round
@ 45°: 11” H x 12” W Rectangle 13” Round
@ 60°: 11” H x 8” W Rectangle 9.5” Round

Spartan S330/2

Heavy-duty swivel base with easy to read protractor.

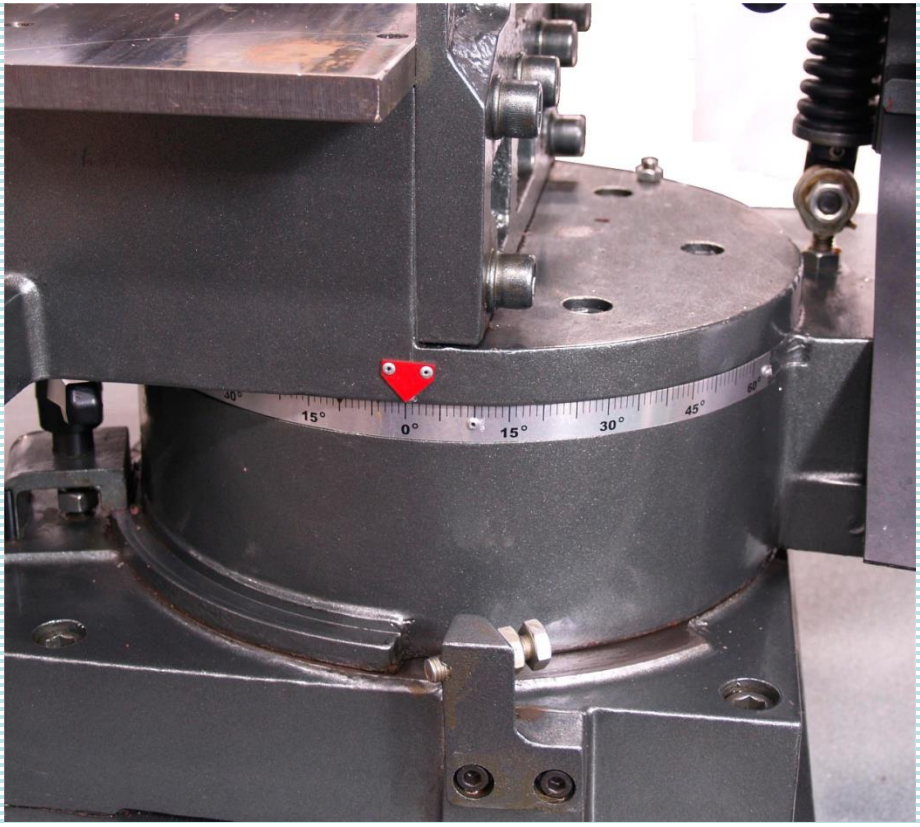

Spartan S330/2

- 3 H.P. Drive motor
- Hydraulic head return
- Easy access hydraulics

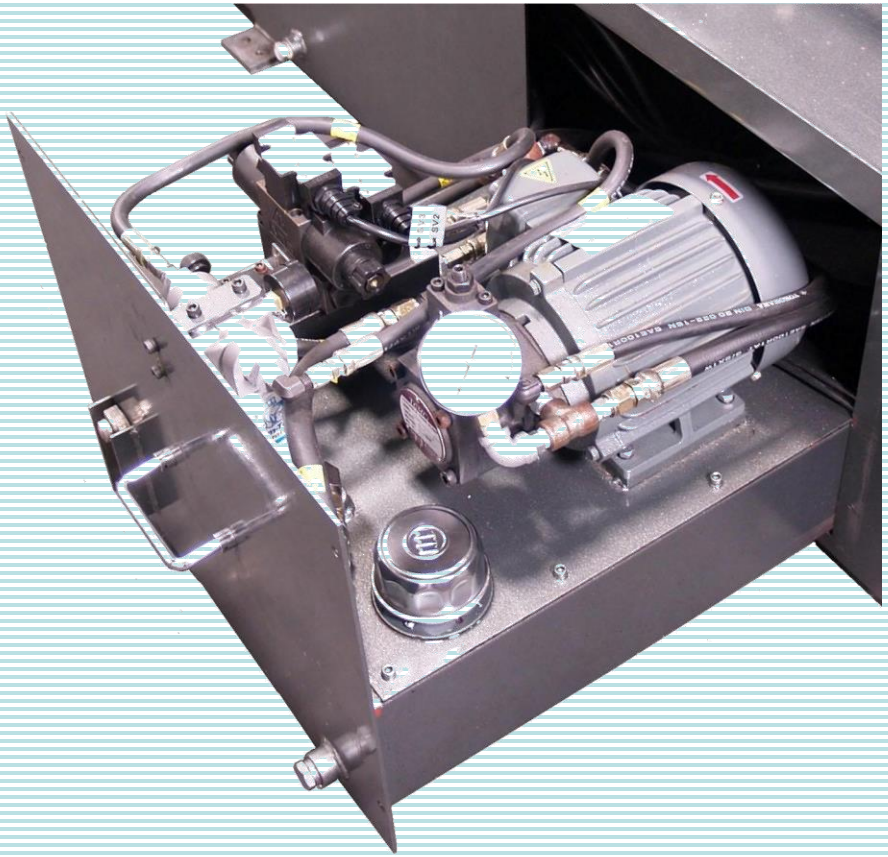

Spartan S330/2

Swing a Operator's console
With user friendly controls

Spartan S330/2
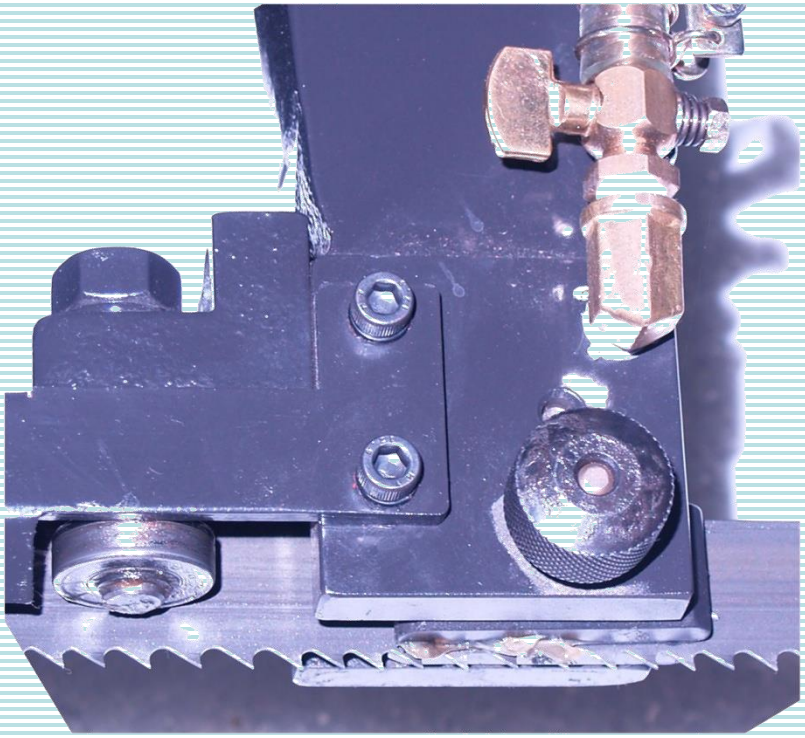
Combination roller and carbide block blade guide design